


SATO PB106 PRICING GUN

INSTRUCTIONS FOR LOADING

These instructions will be suitable for the single line Sato guns, the Samark guns, and also the dual and triple line Sato guns as all these guns have similar design.

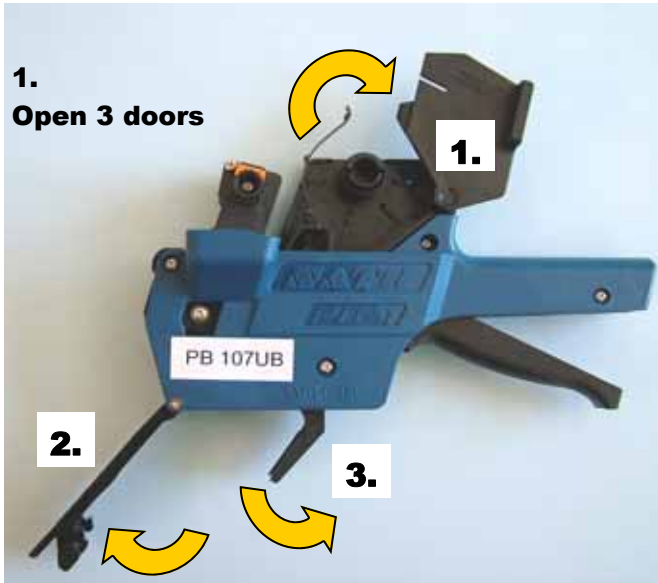

Bottom of the gun should look like this if it is opened correctly.


You should be able to see right through the gun from top to bottom or vice versa if it is fully open.




2. Check that the gun is free of dust and/or adhesive build up. Blow any dust out or clean with a dry cotton bud. Gum residue can easily be removed with methylated spirits or white spirit on a cotton bud.

Keeping the gun clean will keep it running smoothly and avoid down time for your business.


3. Straighten out the start of the label roll.

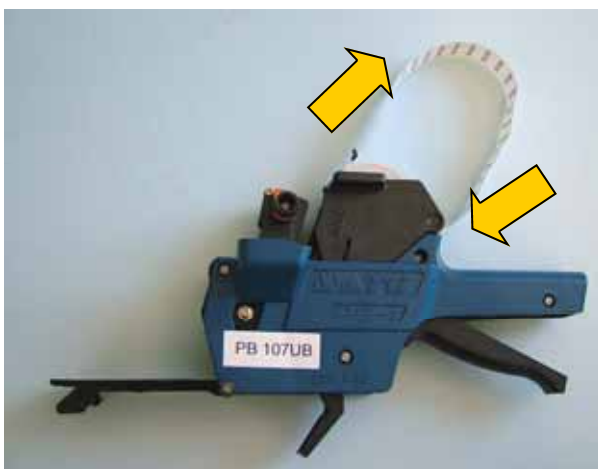

4. Put roll into roll holder and close door with the end of the roll going down inside the gun, near the handle.

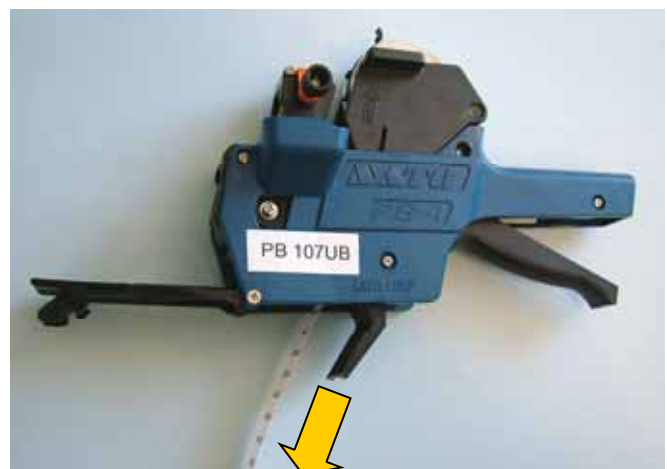

5. Push the end of the roll through the gun until it appears out the bottom of the gun.

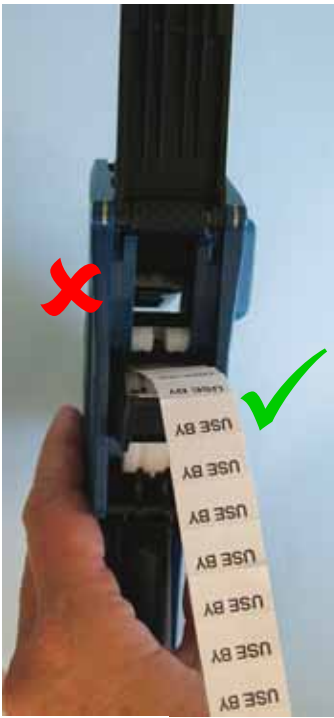

Make sure the label tape is in the correct hole behind the small white rollers and NOT in front of them Hold the gun against your stomach so you can use both hands.

6. Pull a short length of label tape through and fold it over the small internal door.

7. Press the internal door closed and pull tape towards the handle of the gun. The label tape is perforated so that it fits the white sprocket wheel near the handle.



8. Once tape is in position, press the outer door closed until it clicks.

Make sure you press on the grooved thumb press area and NOT right at the back of the flap.

CHANGING THE INK ROLLER

Do NOT attempt to re-ink the roller with stamp pad or other ink as the acids in some inks can destroy the nylon numbers of the print bands and ruin your gun.



- 1. Pull the ink roller arm out from the front of the gun.**
- 2. Slide the ink roller with its bracket sideways off the arm and replace with a new ink roller.**

